



GF 161

Supply and exhaust steel wall grilles


Product	GF 161	
Construction material	Steel	
Finishing	RAL 9010	


GF 161 exhaust grilles are made with phosphate coated steel and are stove enameled (RAL 9010).

They are fitted with stamp-formed vertical vanes with 20° inclination, either to the right or left. They also have a parallel motion damper, operated by a removable lever.


Applications GF 161 grilles are especially used in small and medium conditioning and thermal-ventilation systems. However, they can also be used in bigger systems if appropriately distributed in conditioned spaces and rooms.

Installation GF 161 grilles are for vertical wall installation using visible screws on the outer frame.

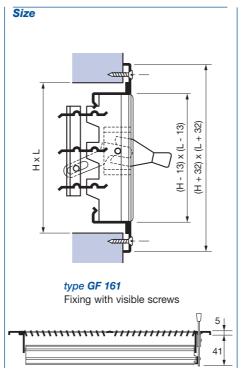



Quick selection

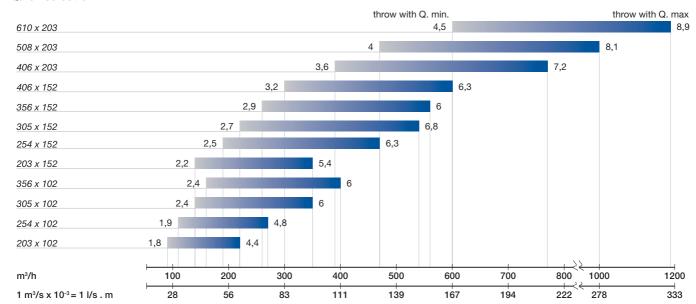

	Q min.	Q max
NR	< 20	< 35
Pressure drop Pa	< 5	< 25