

INDULSNAP

High induction wall diffusers

Product	INDULSNAP
Construction material	Anodized aluminium

Linear wall diffuser which assures a uniform distribution of air with high performances. Available with both supply and exhaust version combined in just one element. Particularly suitable when it is necessary to control the noise coming from the system.


Construction 20 or 40 mm extruded anodized aluminium diffuser with frame. Supply plenum made of special galvanized steel sheet coated with high performance sound attenuator mattress.

Accessoires


- damper with room control device, RAL finishing to be defined

Available also without plenum for direct duct installation type V 20 W/D at V 45 W/D with length from 500 to 2500 mm.

Quick selection

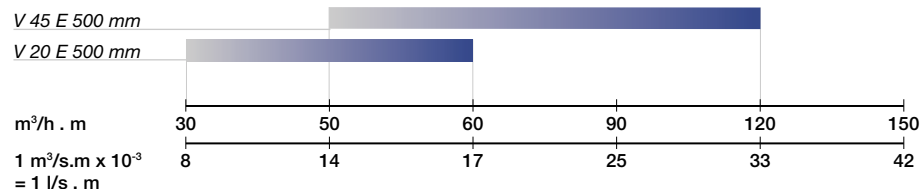

		* Lpa dB(A)	
		Q min.	Q max
V 20 E	30-60	< 30	39
V 45 E	50-120	< 40	39

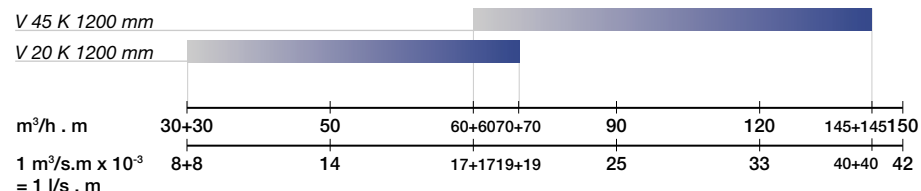

		* Lpa dB(A)	
		Q min.	Q max
V 20 K 1200	70+30/60+60	< 30	39
V 20 K 1200	70+30/144+144	< 40	39

