

GT 010

Adjusting dampers, 100 mm pitch

Product	GT 010
Construction material	Steel
Finishing	Electrolytic galvanized

GT 010 dampers are used to accurately adjust and control the air flow and the air pressure in conditioning and ventilation systems and in air treatment plants. The dampers have electrolytic galvanized

steel finishing; U-shaped frame; veneered blades operated from outside. The pins are made of steel (12 mm diameter) and are located in nylon bushes.

The dampers have an aluminium side gasket that provide a quite good tightness of the closed damper. A projecting 100 mm pin control is used for manual or motor adjusting operations.

Height H (mm)	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
210	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
310	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
410	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
510	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
610	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
710	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
810	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
910	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
1010	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
1110	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
1210	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
1310	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
1410	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
1510	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
1610	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
1710	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
1810	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
1910	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
2010	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
															Double field structure				

Special type

GT 011 type with stainless steel pins and bronze bushes

GT I 010 stainless steel AISI 304 or 316 type



GT P 010 type with parallel blade type

For duct mounted counter frame see technical sheet: WR 002

For wall mounted counter frame see technical sheet: WR 003

For manual controls and electric actuators see technical sheet: "Accessories for adjusting dampers"

Size

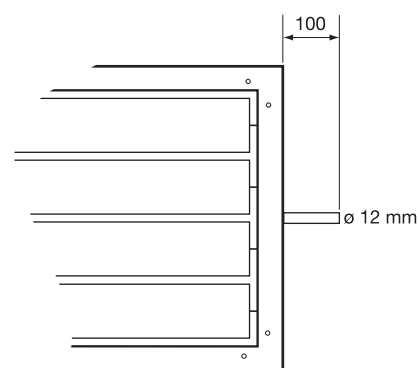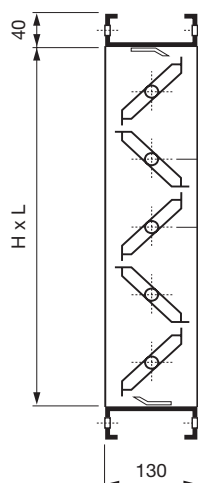

Specify W x H in the order.